



概述


- > 单组输出; 功率75W
single output: 75W
- > 输入电压: AC85~264V; 120~370VDC
input Voltage range: AC85~264V;
120~370VDC

常见规格 General Specification

55.5 × 125.2 × 100mm

性能 Specification	型号 Model	DR-75W-12	DR-75W-15	DR-75W-24	DR-75W-48
直流输出电压、电流 DC output voltage		12V 6.3A	15V 5A	24V 3.2A	48V 1.6A
纹波及噪音 Wave and noise		100mVp-p	150mVp-p	150mVp-p	240mVp-p
进线稳定性 Inlet stability		± 0.5%	± 0.5%	± 0.5%	± 0.5%
负载稳定性 Load stability		± 0.5%	± 0.5%	± 0.5%	± 0.5%
效率 Efficiency		76%	80%	80%	81%
直流电压可调范围 Adjustable range for DC voltage		± 10%	± 10%	± 10%	± 10%
输入电压范围 AC input voltage range	85~264VAC 47~63Hz 120~370VDC				
冲击电流 AC Inrush current	冷启动电流 Cold-start current	20A/115V	40A/230V	20A/115V	40A/230V
过载保护 Overload protection	105%--150%切断输出, 自动恢复 105%--150% constant current limiting, auto-recovery				
过电压保护 Over-voltage protection	121%~142% rated output voltage				
启动、上升、保持时间 Setup rise hold up time	1000ms 60ms 60ms /230VAC				
耐压性 Withstand voltage	输入输出间: 1.5KvAC 输入与外壳间: 1.5Kv 输出与外壳间: 0.5Kv 一分钟 I/P-O/P: 1.5Kv I/P-FG: 1.5Kv O/P-FG: 0.5Kv 1minute				
隔离电阻 Isolation resistance	输入输出间 输入与外壳间 输出与外壳间: 500VDC/100MΩ I/P-O/P I/P-FG O/P-FG: 500VDC/100MΩ				
工作温度 Working temperature	-10°C~+50°C				
安全标准 Safety standards	符合GB4943, UL60950, EN60950 Design refer to GB4943, UL60950, EN60950				
EMC标准 EMC standards	符合GB9254, UL55022 等级B Design refer to GB9254, UL55022, class B				
重量 Weight	0.6kg				

外形尺寸 Overall dimension(mm)

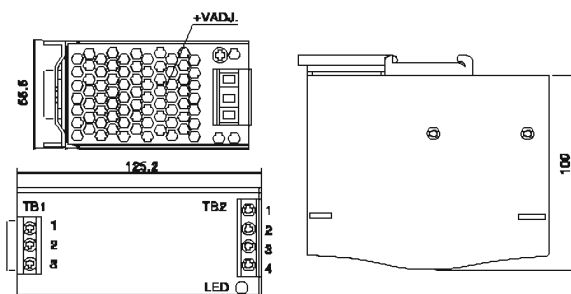

Terminal Pin No. Assignment (TB1)

Pin No.	Assignment
1	FG (⊕)
2	AC/N(DC+)
3	AC/L(DC-)

Terminal Pin No. Assignment (TB2)

Pin No.	Assignment
1,2	DC OUTPUT+V
3,4	DC OUTPUT-V