

概述

- > 单组输出: 功率35W
single output; 35W
- > 输入电压: 110/220VAC ± 20%由拨动开关选择
input Voltage range: 110/220VAC ± 20%
selectable by swich



常见规格General Specification


129 × 98 × 38mm

性能Specification	型号Model	S-35-5	S-35-12	S-35-15	S-35-24
直流输出电压、电流 DC output		5V 7A	12V 3A	15V 2.4A	24V 1.5A
纹波及噪音 Wave and noise		70mVp-p	100mVp-p	100mVp-p	100mVp-p
进线稳定度 Inlet stability		± 0.5%	± 0.5%	± 0.5%	± 0.5%
负载稳定度 Load stability		± 1%	± 0.5%	± 0.5%	± 0.5%
效率 Efficiency		70%	76%	78%	78%
直流电压可调范围 Adjustable range for DC voltage		± 10%	± 10%	± 10%	± 10%
输入电压范围 AC input voltage range		85~132VAC/170~264VAC 由开关选择 47~63Hz, 240~370VDC 85~132VAC/170~264VAC Selected by switch 47~63Hz, 240~370VDC			
冲击电流 AC Inrush current		冷启动电流 18A/115V 36A/230V Cold-start current 18A/115V 36A/230V			
过载保护 Overload protection		105%~150%切断输出, 自动恢复 105%~150% hiccup mode, auto-recovery			
过电压保护 Over-voltage protection					
启动、上升、保持时间 Setup, rise ,hold up, time		200ms, 100ms, 30ms			
耐压性 Withstand voltage		输入输出间: 1.5KvAC 输入与外壳间: 0.5Kv 输出与外壳间: 0.5Kv 一分钟 I/P-O/P:1.5KvAC, I/P-FG:1.5Kv, O/P-FG:1.5Kv, 1minute			
隔离电阻 Isolation resistance		输入输出间 输入与外壳间 输出与外壳间: 500VDC/100MΩ I/P-O/P, I/P-FG, O/P-FG: 500VDC/100MΩ			
工作温度 Working temperature		-10°C~+50°C			
安全标准 Safety standards		符合GB4943, UL60950, EN60950 Design refer to GB4943, UL80950, EN60950			
EMC标准 EMC standards		符合GB9254, EN55022 等级B Design refer to GB9254, 55022, classB			
重量 Weight		0.4kg			

外形尺寸 Overall dimension(mm)

- 图接线位置
- 端口 1,2 : 交流输入
 - 端口 3 : 接地 ⊕
 - 端口 4 : 直流输出 -V
 - 端口 5 : 直流输出 +V

- 图 Terminal Pin No. Assignment
- Pin 1,2 : AC Input
 - Pin 3 : GND ⊕
 - Pin 4 : DC output -V
 - Pin 5 : DC output +V

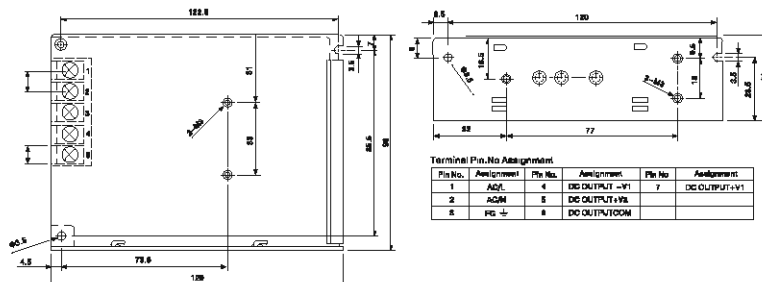

Terminal Pin No Assignment

Pin No.	Assignment	Pin No.	Assignment	Pin No.	Assignment
1	ACI	4	DC OUTPUT -V1	7	DC OUTPUT +V1
2	ACM	5	DC OUTPUT +V2		
3	PG ⊕	6	DC OUTPUT 100M		